


MASS ELASTIC SYSTEM

Cummins 4B/BT/BTA3.9G

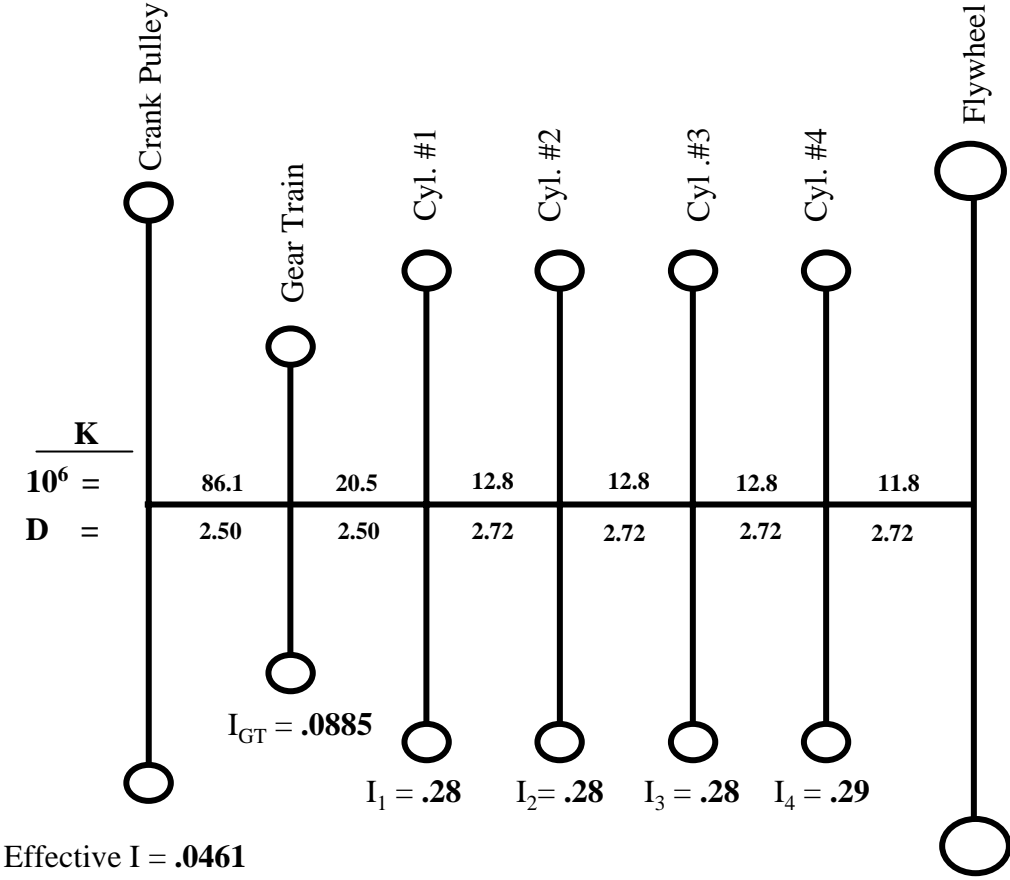

I = Mass Moment of Inertia (in-lb-sec²)
 K = Stiffness (in-lb/radian)
 D = Minimum Shaft Diameter (inches)

- SAE 2: FW9016 $I_{FW} = 11.07$
- SAE 3: FW9017 $I_{FW} = 4.96$
- SAE 3: FW9134 $I_{FW} = 10.30$
- SAE 3: FW9420 $I_{FW} = 6.61$